

PROUDLY 100% AUSTRALIAN OWNED

MACFARLANE GENERATORS

ESTABLISHED 1949

MELBOURNE | SYDNEY | BRISBANE


Automatic Transfer Switch

MAXiATS-MA3-95D

Three Phase | 415 Volt

Automatic Transfer Switch Control Module.

The module is used to monitor three phase AC supply. Once I# AC supply failure is detected, the module automatically controls the generator to start and transfer the switch to II# AC supply.

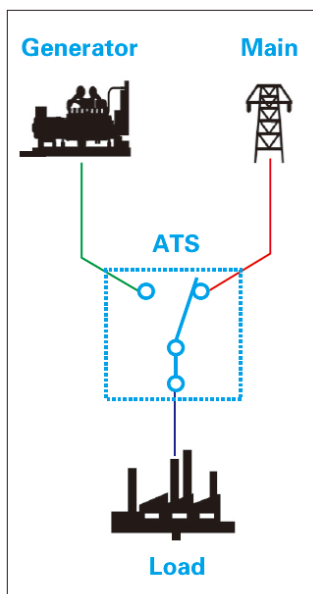

- Fully Automatic
- Auto and Manual Operation
- Built-in Mains & Generator Isolator
- Adjustable Control
- Fast Acting
- Pre-Programmed - Plug-n-Play
- 12 Months RTB Warranty

SALES | SERVICE | SPARES | HIRE | NEW | USED

Specifications

Model	MA3-95D
Rated Volatge (V)	415
Rated Current (A)	95
NO. of Pole	4P
Frequency	50 HZ
Weight (kg)	15
Size (DWH)	210 x 360 x 460mm
Warranty (RTB)	12 months



POWER ANYWHERE, ANYTIME!
1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

info@macgen.com

MELBOURNE

136 Fairbank Road
Clayton South, VIC 3169
(03) 9544 4222

SYDNEY

1 St James Place
Seven Hills, NSW 2147
(02) 9899 6699

BRISBANE

31 South Pine Road
Brendale, QLD 4500
(07) 3205 6333