



Crestchic 250kW - 300kW Loadbank



Description		Transportable	Fixed		
Model					
Country of Origin		United Kingdom			
Max Capacity - Packaged Loadbank		250kW - 300kW			
Voltage Max - Continuous Operation		380V - 415V			
Operating Frequency Range		50Hz			
Phases		3ph			
Wires (Star Connection)		4			
Load-Step Resolution @ Design Voltage		1kW			
Voltage Tolerance (Short Term Operation)		+5%			
Load Element Tolerance		+/-5%			
Elements		80/20 nickel chrome resistance wire			
Insulation Test		500V			
Auxiliary Supply Voltage		220V - 240V	380V - 415V		
Operating Frequency Range		50Hz	50Hz		
Phases		1ph	3ph		
Load Connections		M16 Copper Busbars			
Protection		Thermal Emergency Cut Out Fan Overload Emergency Stop			
Control Voltage		Selectable - Test or Auxiliary			
Cooling Method		Forced Air Cooling (Horizontal)			
Air-Flow (Approx.)		170m ³ /min			
Load Switching Category		AC-1 Resistive			
Load Switching Contactor Type		3 Pole AC Contactors			
Rated Maximum Ambient Temperature Operation		+40°C / +104°F			
Rated Minimum Ambient Temperature Operation		-20°C / -4°F			
Rated Maximum Relative Humidity		95% RH			
Altitude Rating		<500m [m.a.s.l.]			
Enclosure		Sheet Steel			
Finish		White - RAL9016			
Control Chamber IP Rating		IP55			
Lifting		Lifting Eyes x2			
Enclosure Dimensions		Castors	Channels	FLB	Fixed *
Length (Approx.)	mm	893	893	893	1048
Width (Approx.)	mm	875	875	875	875
Height (Approx.)	mm	1325	1276	1330	1276
Total Weight (Approx.)	kg	260	270	350	275
Loadbank Control Systems					
Control		KCS		MCS	
		KCS100H - 10m Lead		PC Software or HHT	
Optional Extras:		VIP - Power Meter		Modbus	
		KCS100L (Local)			
		KCS100R (Remote)			
		Extendable System		Extend - Standard	
Load Connection Type		1-Phase and/or Delta			
Frequency / Connections		60Hz and 3-Wire Connection			
Control Extension Cables		50m or 100m Extension			
Transportation		2-Wheel Trailer Mounted			
Load Connections		Powerlocks			
Protection Cover		Loadbank PVC Cover			

* Permanent installation only



250kW - 300kW AC - Issue 1 - 03/02/15 (Changes to specification may vary without notice)

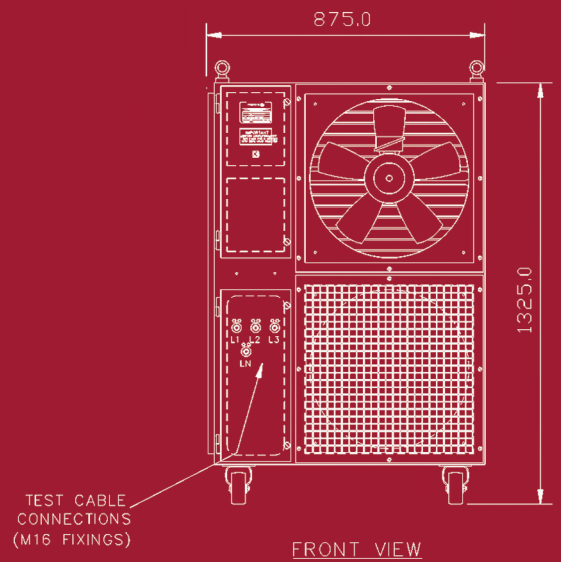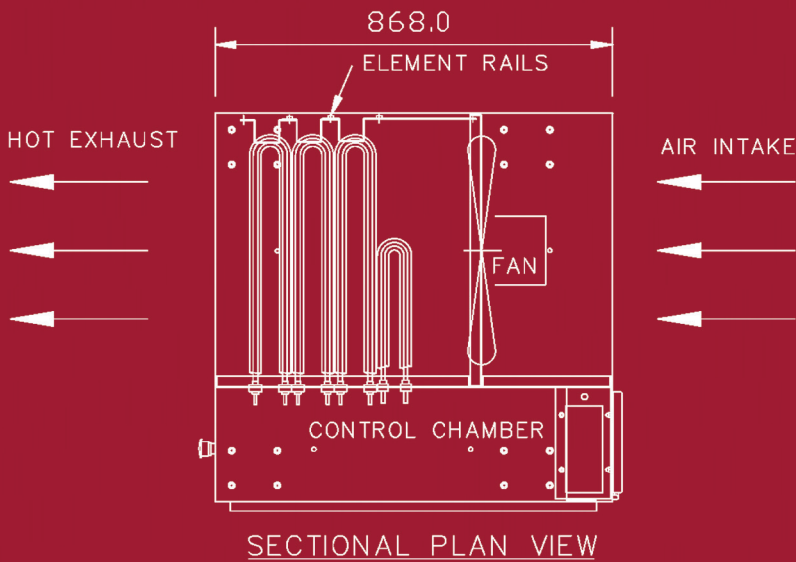

Quality without compromise

Our loadbanks are characterised by one thing above all: quality. At every stage of our supply chain, from raw material to finished item, we work with established, worldclass suppliers and implement our own uncompromising quality control processes to ensure that our products perform better and last longer.

Note: Loadbank illustrated with rental crash pack option

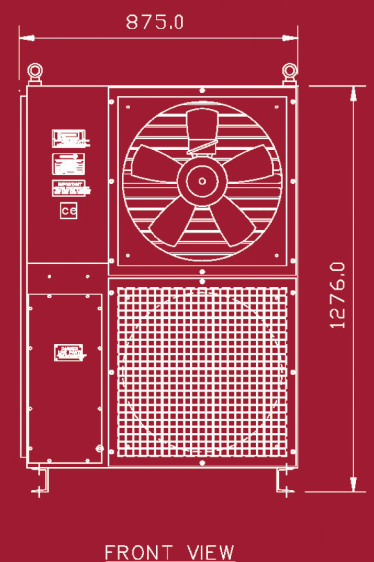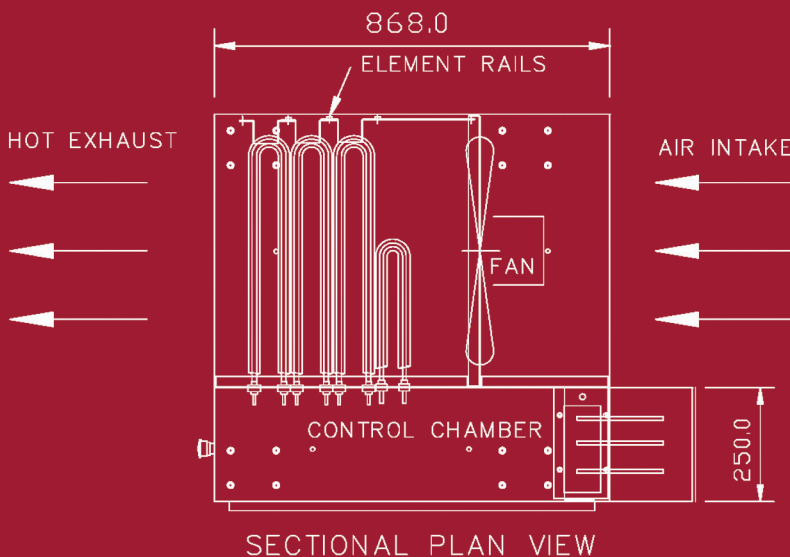

1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

MELBOURNE

136 Fairbank Road,
Clayton South, VIC 3169
Ph: 03 9544 4222

SYDNEY

1 St James Place,
Seven Hills, NSW 2147
Ph: 02 9899 6699

BRISBANE

31 South Pine Road,
Brendale, QLD 4500
Ph: 07 3205 6333

Mon - Fri 7.30am - 5pm Sat 7.30am - 12pm

Mon - Fri 7.30am - 5pm

Mon - Fri 7.30am - 5pm