

POWERLINK RK Kubota Series Diesel Generator with Leroy Somer Alternator



Model: **GMS10KS-AU**
 Frequency: **50Hz**
 Fuel type: **Diesel**
 Powered by: **KUBOTA Engine**

415/240V-50Hz-3Phase

- Powerful heavy-duty Kubota industrial diesel and low emissions engine
- Intelligent control - Manual & Remote start
- Weather protective and sound attenuated enclosure
- Comprehensive warranty and service
- Outlets - 2x 15A, 1x 20A 3PH

TECHNICAL SPECIFICATIONS

Model	GMS10KS-AU			
Power(ESP)	kVA/kW	10.8/8.6		
Power(PRP)	kVA/kW	10/8		
Structure Type		RS		
Fuel Consumption	Litre/hour	Fuel consumption100% (of the Prime Power)	3.5 L/h	
		Fuel consumption75% (of the Prime Power)	2.9 L/h	
		Fuel consumption50% (of the Prime Power)	1.8 L/h	
		Fuel consumption25% (of the Prime Power)	N/A	
Fuel Tank Capacity	Litre	100		
Noise Level	dB(A)@7m	64.7		
Dimensions and Weight	Length	Width	Height	Weight
	1932 mm	927 mm	1308 mm	700 kg

ENGINE SPECIFICATIONS

Manufacturer	Kubota
Model	D1105-BG
Engine Speed Rated	1500 RPM
Cylinder /Arrangement	3
Displacement	1123 L
Bore and Stroke	78 mm × 78.4 mm
Compression Ratio	22
Intake Resistance	1.96kPa
Type of Injection	Direct
Total Oil Capacity	5.1 L
Coolant Capacity	6.4 L

PROUDLY 100% AUSTRALIAN OWNED


**MACFARLANE
GENERATORS**
ESTABLISHED 1949

Power Anywhere Anytime | GMS10KS-AU | 09.2021

MACFARLANEGENERATORS.COM.AU

ALTERNATOR SPECIFICATIONS

Manufacturer	Leroy Somer
Phase	3
Power Factor	0.8
Bearing	1
Exciter type	Brushless
Insulation : Class , temperature rise	H
Degree of protection	IP23
AVR model	
Altitude	≤1000m
Winding Pitch	2/3
Overspeed	2250rpm

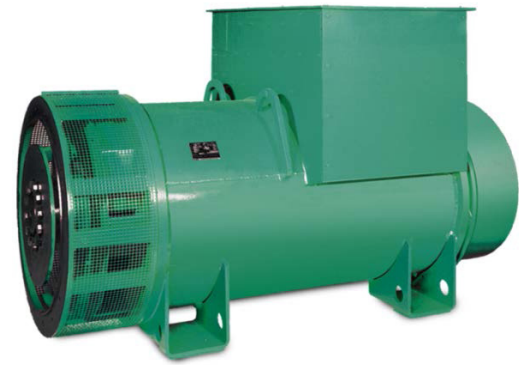

AIR SYSTEM

Engine Air Flow	0.11 m ³ /s(50Hz)
-----------------	------------------------------

Note: All data sheets are for reference only and subject to change without prior notice.

CONTROL PANEL

PowerLink	PLC-920
-----------	---------

KEY FEATURES

- Standard Control Function
- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Over Speed Protection
- Protection Hold-off Timer
- Charge Failure Warning



PROUDLY 100% AUSTRALIAN OWNED

**MACFARLANE
GENERATORS**

ESTABLISHED 1949

POWER ANYWHERE ANYTIME

MELBOURNE | SYDNEY | BRISBANE

www.macfarlanegenerators.com.au | info@macgen.com
SALES | SERVICE | SPARES | HIRE | NEW | USED