

Generator set data sheet



Model: C500D5
Frequency: 50 Hz
Fuel type: Diesel

Spec sheet:	EMERS-5888-EN
Sound data sheet:	MSP-4088
Cooling data sheet:	MCP-TBD
Prototype test summary data sheet:	PTS-TBD
Alternator data sheet:	ADS-305, ADS-306

Fuel consumption	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	500 (400)				455 (364)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
Gal (UK)/hr	7.7	12.2	17.3	22.8	7.3	11.4	15.8	20.8
L/hr	34.79	55.6	78.5	107.1	29.2	49	69.9	93.2

Engine	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	QSZ13-G5	
Configuration	4 cycle; in-line 6 cylinder diesel	
Aspiration	Turbocharged and charge air-cooled	
Gross engine power output, kWm	470	411
BMEP at set rated load, kPa	2892	2529
Bore, mm	130	
Stroke, mm	163	
Rated speed, rpm	1500	
Piston speed, m/s	8.1	
Compression ratio	17.1	
Lube oil capacity, L	75.33	
Overspeed limit, rpm	1500 ±10%	
Regenerative power, kW	36	
Governor type	Electronic	
Starting voltage	24 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	247
Maximum fuel inlet restriction, mm Hg	101
Maximum fuel inlet temperature, °C	71

Air	Standby rating	Prime rating
Combustion air, m ³ /min	35.5	33.9
Maximum air cleaner restriction, kPa	3.2 – 6.2	

Exhaust

Exhaust gas flow at set rated load, kg/min	29.5	27.8
Exhaust gas temperature, °C	523	485
Maximum exhaust back pressure, kPa	13	

Standard set-mounted radiator cooling

Ambient design, °C	50*	
Fan load, kWm	14.2	
Coolant capacity (with radiator), L	77.1	
Cooling system air flow, m ³ /sec @ 12.7 mm H ₂ O	8.1	
Total heat rejection**, Btu/min	16700	13700
Maximum cooling air flow static restriction mm H ₂ O	25.4	

*Based on cooling air flow static restriction 12.7mmH₂O

**Total heat rejection includes jacket water circuit, aftercooler circuit, fuel circuit, heat radiated to room.

Weights*

	Open	Enclosed
Unit dry weight kgs	3879	5015/4807**
Unit wet weight kgs	3977	5080/4872**

*Weights represent a set with standard features. See outline drawing for weights of other configurations.

**Weights for 4-point chassis lift.


Dimensions

	Length	Width	Height
Standard open set dimensions mm	3376	1500	2191
Enclosed set standard dimensions mm	5095/5095**	1564/1564**	2441/2330**


**Dimensions are for 4-point chassis lift.

Genset outline

Open set

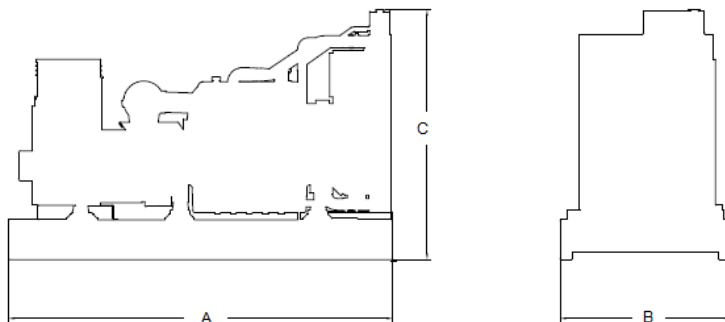

Enclosed set

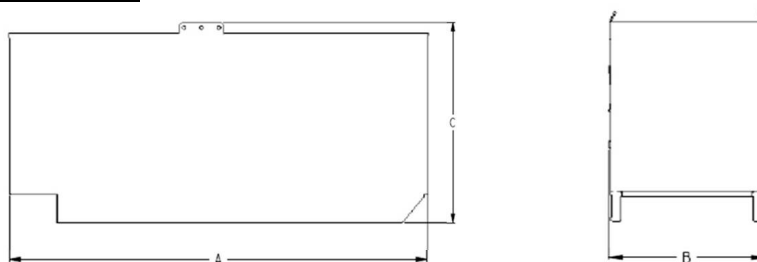

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	163/125 C	S/P	HC5D	190-220V,380-440V
Wye, 3-phase	150 C	S	HC5D	190-220V,380-440V
Wye, 3-phase	105 C	P	HC5E	190-220V,380-440V

Ratings definitions

Emergency Standby Power (ESP):	Prime Power (PRP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel stop power in accordance with ISO 3046-1, obtained and corrected in accordance with ISO 15550.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO8528,ISO 3046-1 and corrected in accordance with ISO15550.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

For more information contact your local Cummins distributor or visit power.cummins.com



Our energy working for you.™

©2021 Cummins Inc. All rights reserved. Cummins is a registered trademark of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Inc. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice. EMERD-5935-EN C500D5 (06/22)

PROUDLY 100% AUSTRALIAN OWNED

MACFARLANE GENERATORS 

ESTABLISHED 1949

VICTORIA (HEAD OFFICE) REC: 691
136 Fairbank Road, Clayton South, VIC 3169 Ph: 03 9544 4222 Fax: 03 9543 7138

NEW SOUTH WALES BRANCH REC: 261624C
1 St. James Place, Seven Hills, NSW 2147 Ph: 02 9899 6699 Fax: 02 9899 8048

QUEENSLAND BRANCH REC: 72635
31 South Pine Road, Brendale, QLD 4500 Ph: 07 3205 6333 Fax: 07 3205 6344

PO Box 5176, Clayton, VIC 3168 www.macfarlanegenerators.com.au info@macgen.com
Macfarlane Generators PTY. LTD. ACN 006 849 074 ABN 74 006 849 074

SALES | SERVICE | SPARES | HIRE | NEW | USED