

POWERLINK EP Perkins Series Diesel Generator with Leroy Somer Alternator



Model: **WPS800S-AU**
 Frequency: **50Hz**
 Fuel type: **Diesel**
 Powered by: **PERKINS SERIES**

415/240V-50Hz-3Phase

- Powerful heavy-duty Perkins industrial diesel and low emissions engine
- Intelligent control - Manual & Remote start
- Weather protective and sound attenuated enclosure
- Comprehensive warranty and service

TECHNICAL SPECIFICATIONS

Model	WPS800S-AU			
Power(ESP)	kVA/kw	880/704		
Power(PRP)	kVA/kw	800/640		
Voltage	V	415/240		
Fuel Consumption	Litre/hour	Fuel consumption 100% (of the Prime Power)	172 L/h	
		Fuel consumption 75% (of the Prime Power)	137 L/h	
		Fuel consumption 50% (of the Prime Power)	87 L/h	
		Fuel consumption 25% (of the Prime Power)	N/A	
Fuel Tank Capacity	Litre	1150		
Noise Level	dB(A)@7m	76.9		
Dimensions and Weight	Length	Width	Height	Weight
	4800 mm	1600 mm	2450 mm	8800 kg

ENGINE SPECIFICATIONS

Manufacturer	Perkins
Model	4006-23TAG3A
Engine Speed Rated	1500 RPM
Cylinder /Arrangement	6
Displacement	22.92 L
Bore and Stroke	160 mm x 190 mm
Compression Ratio	13.6
Intake Resistance	< 3.7kPa
Governor Type	Direct Injection
Total Oil Capacity w/Filters	113.4 L
Coolant Capacity	105 L

PROUDLY 100% AUSTRALIAN OWNED

**MACFARLANE
GENERATORS**
ESTABLISHED 1949

Power Anywhere Anytime | WPS800S-AU | 02.2022

MACFARLANEGENERATORS.COM.AU

ALTERNATOR SPECIFICATIONS

Manufacturer	Leroy Somer LSA49.3M8
Phase	3
Power Factor	0.8
Bearing	1
Exciter type	Brushless
Insulation : Class , temperature rise	H
Degree of protection	IP23
AVR model	D350
Altitude	≤1000m
Winding Pitch	2/3
Overspeed	2250rpm



AIR SYSTEM

Engine Air Flow	1.614m³/s(50Hz)
-----------------	-----------------


Note: All data sheets are for reference only and subject to change without prior notice.

CONTROL PANEL

Powerlink	PLC7420
-----------	---------

KEY FEATURES

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol

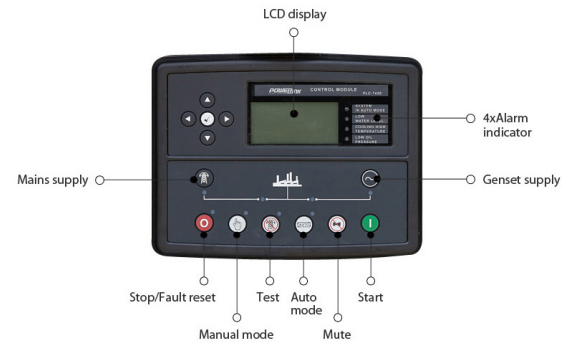

PROUDLY 100% AUSTRALIAN OWNED

MACFARLANE GENERATORS

ESTABLISHED 1949

POWER ANYWHERE ANYTIME

MELBOURNE | SYDNEY | BRISBANE

www.macfarlanegenerators.com.au | info@macgen.com

SALES | SERVICE | SPARES | HIRE | NEW | USED